


Decking Screws



Decking Screw - Double Countersunk

Exterior (Green Organic)

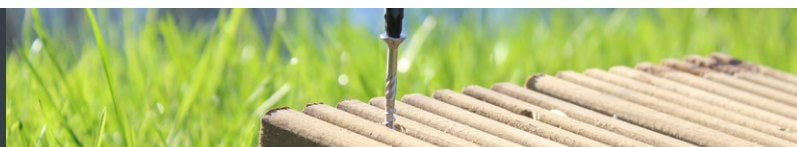

POZI EN 14592:2008

Long Lasting
Corrosion
Resistance!

An economic but highly effective softwood decking screw. Plated to withstand up to 500 hours in a salt spray test and is designed to give a rapid installation and a secure fixing.

Product Code	Size (mm)	Driver Bit Size	Pack Qty (pcs)	Carton Qty (packs)	Pallet Qty (packs)
BOX					
50TDECK	4.5 x 50	P22	200	15	540
60TDECK	4.5 x 60	P22	200	15	540
70TDECK	4.5 x 70	P22	200	16	384
80TDECK	4.5 x 80	P22	200	16	384
IDD01					
TUB (DRIVER BIT INCLUDED)					
50TDECK2000	4.5 x 50	P22	2,000	2	72
60TDECK1500	4.5 x 60	P22	1,500	2	72
IDD01					
INDUSTRY PACK (1,000 PCS)					
60TDECKIND	4.5 x 60	P22	1,000	6	144
IDD01					



Box



Industry Pack



Tub

Decking Screw - Double Countersunk

A2 Stainless Steel



POZI EN 14592:2008

Superior
Corrosion
Resistance!

An economic but highly effective softwood decking screw. Manufactured from A2 Stainless Steel. Offering superior corrosion resistance making it ideal for multiple external applications, especially for the construction of decking platforms. Stainless steel must be used where there is a corrosive environment and/or the base material has inherent corrosive characteristics e.g. Green Oak.

Product Code	Size (mm)	Driver Bit Size	Pack Qty (pcs)	Carton Qty (packs)	Pallet Qty (packs)
TUB					
50TDECKSS	4.5 x 50	P22	250	8	288
65TDECKSS	4.5 x 65	P22	250	8	288
IDD02					



Tub

Collated Decking Screws



C2 Deck-Fix Collated Decking Screw



SQUARE EN 14592:2008

Exterior (Green Organic)

A premium decking screw using the C2 twin-cut technology. The collated strips are designed to be compatible with all leading power tool brands.

Product Code	Size (mm)	Pack Qty (pcs)	Carton Qty (packs)	Pallet Qty (packs)
BOX				
65C2DCOLL	4.5 x 65	500	10	240
COL08				

C2

DECK-FIX
PREMIUM SCREWDESIGNED FOR DECKING
PLATFORMS & EXTERNAL
TIMBER CONSTRUCTION

See Page 29

