

# Universal Intumescent Tubular Latch, Deadlock & Sashlock Kits

NEW

TIMCO FlexiFire HS is a graphite-based elastomeric sheet material custom cut for use on rebated hardware such as tubular latches, deadlocks and sashlocks. FlexiFire HS has an expansion ratio in excess of 15 times its original volume.

- Safe to handle and easy to use (no PPE required)
- Excellent temperature insulation before and after exfoliation
- Completely non-toxic and non-fibrous
- Unaffected by moisture, humidity, atmospheric pollution
- When heated to approximately 180°C graphite located at the surface begins to exfoliate
- FlexiFire has been tested extensively to both
- BS476 Part 22 & EN1634-1




Tubular Latch



Deadlock



Sashlock



Product Code	Size	Thickness (mm)	Fire Rating (mins)	Pack Qty (pcs)	Carton Qty (packs)
<b>TIMPAC</b>					
<b>TUBULAR LATCH KIT</b>					
487050	Universal	1.0	30 & 60	1	100
<b>DEADLOCK KIT</b>					
487677	Universal	1.0	30 & 60	1	100
<b>SASHLOCK KIT</b>					
487359	Universal	1.0	30 & 60	1	100


ITS02

# Intumescent Letterbox

NEW

A stylish ABS framed, telescopic letterbox, with metal flaps and fitted with a high performance intumescent liner. In the event of fire the intumescent liner expands rapidly and seals off the letterbox opening, preventing the spread of fire and smoke whilst maintaining the integrity of the fire door assembly.

- Fire tested to BS 476 part 22: 1987 & BS EN 1634-1
- Acoustic tested to BS EN ISO 140-3: 1995 Achieving 32dB Rw
- Security tested to BS EN 13724 Clause 6.6.5 (Compliant within scope of PAS 23/24)
- Smoke tested to BS 476 part 31/1: 1983
- Integral sound dampening bumpers
- Ergonomic curved edge design

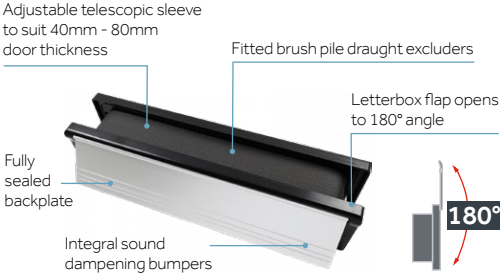

Product shown is Satin Anodised Aluminium with black frame.



Polished Gold


Product Code			Size L x H (mm)	Frame Colour	Fire Rating (mins)	Pack Qty (pcs)	Carton Qty (packs)
Satin Anodised Aluminium	Polished Silver	Polished Gold					
<b>BOX - FIXINGS INCLUDED</b>							
487438	487457	487158	272 x 70	Black	30	1	10
487009	-	-	272 x 70	Silver	30	1	10
487051	487299	487279	305 x 70	Black	30	1	10
487382	-	-	305 x 70	Silver	30	1	10

ITS03

# Applique Drop Down Seal

NEW

The seals are activated by the closing action of the door, dropping down to seal only when the door is closed. This leaves the door threshold clear and flat, without the need for high fixed thresholds. Designed to form an effective barrier against the outside climate, noise, light, fire, smoke and insects. They provide a cost-effective solution for document part E and part M of the latest UK building regulations relating to disability access and energy conservation.

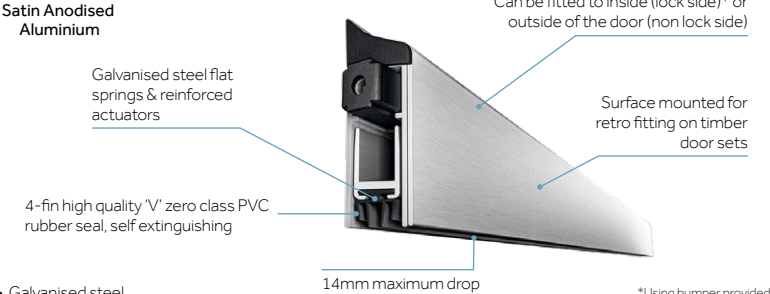

- Galvanised steel flat springs and reinforced actuators
- Acoustic testing BS EN ISO 140-3: 1995 rating of up to 37dB Rw
- Fire tested to BS476: Part 20/22: 1987 to 60 mins
- Smoke tested to BS EN 1634-3: 2004

Product Code		Size L x H (mm)	Width (mm)	Maximum Drop (mm)	Fire Rating (mins)	Pack Qty (pcs)	Carton Qty (packs)
Satin Anodised Aluminium							
<b>BOX - FIXINGS INCLUDED</b>							
487918		730 x 40	13	14	60	1	5
487647		830 x 40	13	14	60	1	5
487250		930 x 40	13	14	60	1	5
487333		1030 x 40	13	14	60	1	5

ITS03

# Intumescent Pipe Collars & Wraps



See page 72