

## C2 Clamp-Fix Premium Screw

NEW

Yellow



TX DRIVE



EN 14592:2008

CORROSION RATING



Occasionally damp/wet, rural and sheltered areas



HARD & SOFT WOODS



MAN MADE BOARDS



THIN METAL




PLASTIC

A premium multi-material screw featuring the award winning C2 twin-cut technology. The dual angle partial thread and high torque TX drive ensures maximum clamping strength on every fixing.

Designed to prevent the timber from 'jacking' apart when fastening timber to timber. Ideal for applications such as timber studwork, panelling, roof and decking framework.

### Advanced Clamping Performance

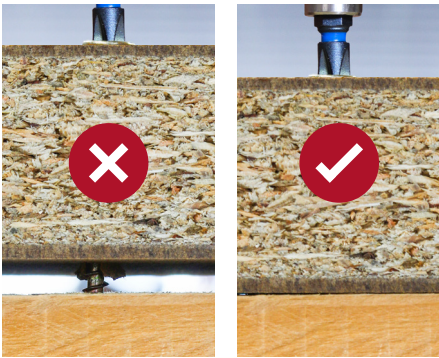

Prevents the timber 'jacking' apart

### C2 Clamp-Fix Premium Screw Boxes



Product Code	Size (mm)	Max. CFT (mm)	Driver Bit Size	Pack Qty (pcs)	Carton Qty (packs)	Pallet Qty (packs)
--------------	-----------	---------------	-----------------	----------------	--------------------	--------------------

BOX						
40025C2C	4.0 x 25	0	TX20	200	75	1,800
40030C2C	4.0 x 30	0	TX20	200	75	1,800
40035C2C	4.0 x 35	0	TX20	200	50	1,200
40040C2C	4.0 x 40	10	TX20	200	50	1,200
40045C2C	4.0 x 45	15	TX20	200	35	840
40050C2C	4.0 x 50	20	TX20	200	35	840
40060C2C	4.0 x 60	20	TX20	200	15	540
40070C2C	4.0 x 70	30	TX20	200	15	540
40080C2C	4.0 x 80	30	TX20	200	16	384
45070C2C	4.5 x 70	30	TX25	200	16	384
45080C2C	4.5 x 80	30	TX25	200	16	384
50030C2C	5.0 x 30	0	TX25	200	50	1,200
50040C2C	5.0 x 40	10	TX25	200	35	840
50050C2C	5.0 x 50	20	TX25	200	15	540
50060C2C	5.0 x 60	20	TX25	200	16	384
50070C2C	5.0 x 70	30	TX25	200	16	384
50075C2C	5.0 x 75	35	TX25	200	16	384
50080C2C	5.0 x 80	30	TX25	200	16	384
50090C2C	5.0 x 90	30	TX25	100	15	540
50100C2C	5.0 x 100	40	TX25	100	15	540
60050C2C	6.0 x 50	20	TX30	200	16	384
60060C2C	6.0 x 60	20	TX30	200	16	384
60070C2C	6.0 x 70	30	TX30	200	12	288
60080C2C	6.0 x 80	30	TX30	200	12	288
60090C2C	6.0 x 90	30	TX30	100	15	540
60100C2C	6.0 x 100	30	TX30	100	15	540
60120C2C	6.0 x 120	50	TX30	100	16	384
60130C2C	6.0 x 130	60	TX30	100	16	384
60150C2C	6.0 x 150	80	TX30	100	12	324
60180C2C	6.0 x 180	110	TX30	100	8	216
60200C2C	6.0 x 200	130	TX30	100	8	216
80080C2C	8.0 x 80	40	TX40	100	16	384
80100C2C	8.0 x 100	20	TX40	100	12	288
80120C2C	8.0 x 120	40	TX40	50	12	288
80150C2C	8.0 x 150	70	TX40	50	12	288
80200C2C	8.0 x 200	120	TX40	50	8	216
80225C2C	8.0 x 225	145	TX40	50	8	216
80250C2C	8.0 x 250	170	TX40	50	9	216
80275C2C	8.0 x 275	195	TX40	25	9	216
80300C2C	8.0 x 300	220	TX40	25	9	216
80360C2C	8.0 x 360	280	TX40	25	9	270
80420C2C	8.0 x 420	340	TX40	25	9	270

TYPE - CF2 | SUB TYPE - CF201 CFT = CLAMPING FIXTURE THICKNESS

NOTE: Partially threaded from 40mm and above. Helix shank from 100mm and above.

### C2 Clamp-Fix Premium Screw Tubs



### C2 Impact Power Bit Included

Designed to handle the most demanding impact driving applications with optimum durability and unbeatable break resistance.



**x3  
TX  
38mm  
Power Bit  
Included**

Product Code	Size (mm)	Max. CFT (mm)	Driver Bit Size	Pack Qty (pcs)	Carton Qty (packs)	Pallet Qty (packs)
--------------	-----------	---------------	-----------------	----------------	--------------------	--------------------

TUB (DRIVER BIT INCLUDED)						
40040C2CTUB	4.0 x 40	10	TX20	1,200	20	180
40050C2CTUB	4.0 x 50	20	TX20	800	20	180
50050C2CTUB	5.0 x 50	20	TX25	600	20	180
50070C2CTUB	5.0 x 70	30	TX25	375	20	180
50080C2CTUB	5.0 x 80	30	TX25	350	20	180
50100C2CTUB	5.0 x 100	40	TX25	300	20	180

TYPE - CFT | SUB TYPE - CFT01 CFT = CLAMPING FIXTURE THICKNESS

NOTE: Partially threaded from 40mm and above. Helix shank from 100mm and above.