


Exterior Coach Screws & Carriage Bolt



Exterior Coach Screw

Exterior (Green Organic)

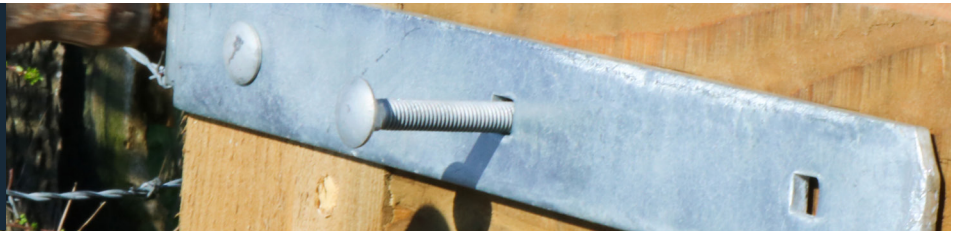

HEX



EN 14592:2008

CORROSION RATING



Urban & industrial areas with a low salt atmosphere

A traditional way of fastening timber with an added advantage of a corrosion resistant plating for external applications.

Coated with a patented multi-layer corrosion resistant plating to

withstand 500 hours salt spray making it ideal for external applications.

Manufactured to DIN571.

| Product Code | Size (mm) | Socket Size (mm) | Pack Qty (pcs) | Carton Qty (packs) |
|--------------|-----------|------------------|------------------|--------------------|
| BAG | | | | |
| 640INCSB | 6.0 x 40 | 10.0 | 10 | 80 |
| 650INCSB | 6.0 x 50 | 10.0 | 10 | 70 |
| 675INCSB | 6.0 x 75 | 10.0 | 10 | 70 |
| 850INCSB | 8.0 x 50 | 13.0 | 10 | 70 |
| 875INCSB | 8.0 x 75 | 13.0 | 10 | 50 |
| TYPE - IND | | | SUB TYPE - IND03 | |

Exterior Carriage Bolt

Exterior (Green Organic)



DOMED



EN 14592:2008

CORROSION RATING



Urban & industrial areas with a low salt atmosphere

A domed head bolt with a square anti spin shoulder mainly used for clamping timber or attaching ironmongery to timber.

Coated with a patented multi-layer corrosion resistant plating to

withstand 500 hours salt spray making it ideal for external applications.

Manufactured to DIN 603, DIN 934 and DIN 125-A.

| Product Code | Size (mm) | Socket Size (mm) | Pack Qty (pcs) | Carton Qty (packs) | Pallet Qty (packs) |
|--------------|-----------|------------------|------------------|--------------------|--------------------|
| BAG | | | | | |
| 10100INCB | M10 x 100 | 17.0 | 10 | 10 | 1000 |
| 10150INCB | M10 x 150 | 17.0 | 10 | 6 | 600 |
| 10160INCB | M10 x 160 | 17.0 | 10 | 6 | 600 |
| 10200INCB | M10 x 200 | 17.0 | 10 | 6 | 600 |
| 10220INCB | M10 x 220 | 17.0 | 10 | 5 | 500 |
| TYPE - IND | | | SUB TYPE - IND04 | | |

Exterior (Silver Organic)



DOMED



EN 14592:2008

CORROSION RATING



Urban & industrial areas with a low salt atmosphere

A domed head bolt with a square anti spin shoulder mainly used for clamping timber or attaching ironmongery to timber.

Coated with a patented multi-layer corrosion resistant plating to

withstand 1,000 hours salt spray test making it ideal for external applications.

Supplied with hex nuts and form A washers.

| Product Code | Size (mm) | Socket Size (mm) | Pack Qty (pcs) | Carton Qty (packs) | Pallet Qty (packs) |
|--------------|-----------|------------------|------------------|--------------------|--------------------|
| BAG | | | | | |
| 0640CBI | M6 x 40 | 10.0 | 10 | 5 | 600 |
| 0650CBI | M6 x 50 | 10.0 | 10 | 5 | 600 |
| 0675CBI | M6 x 75 | 10.0 | 10 | 5 | 600 |
| 06100CBI | M6 x 100 | 10.0 | 10 | 5 | 600 |
| 0850CBI | M8 x 50 | 13.0 | 10 | 5 | 600 |
| 0875CBI | M8 x 75 | 13.0 | 10 | 5 | 600 |
| 08100CBI | M8 x 100 | 13.0 | 10 | 5 | 600 |
| 08110CBI | M8 x 110 | 13.0 | 10 | 5 | 600 |
| 08130CBI | M8 x 130 | 13.0 | 10 | 5 | 400 |
| 08150CBI | M8 x 150 | 13.0 | 10 | 5 | 400 |
| 1075CBI | M10 x 75 | 17.0 | 10 | 5 | 600 |
| 10100CBI | M10 x 100 | 17.0 | 10 | 5 | 600 |
| 10120CBI | M10 x 120 | 17.0 | 10 | 5 | 400 |
| 10130CBI | M10 x 130 | 17.0 | 10 | 5 | 400 |
| 10150CBI | M10 x 150 | 17.0 | 10 | 5 | 400 |
| 10180CBI | M10 x 180 | 17.0 | 10 | 5 | 400 |
| 1275CBI | M12 x 75 | 19.0 | 10 | 5 | 600 |
| 12100CBI | M12 x 100 | 19.0 | 10 | 5 | 400 |
| 12130CBI | M12 x 130 | 19.0 | 10 | 5 | 400 |
| TYPE - CAB | | | SUB TYPE - CAB03 | | |

Coach Screws

Platings available:

Zinc

Page
37



Full Range of Carriage Bolts

Platings available:

Zinc

Exterior

HDG

Page
57

