

# ZIP-FIX®

## CAVITY FIXING

# RAPID INSTALLATION

Heavy duty cavity wall anchor for use in plasterboards, most hollow concrete blocks, cavity walls and ceilings.

Pack includes both 40mm and 60mm screws for a wider variety of fixture thicknesses.

### WEIGHTS & MATERIALS

30 KG

**DRYWALL / PLASTERBOARD**  
12.5mm Thickness

47 KG

**DOUBLE BOARD**  
25mm Thickness

56 KG

**DENSE BOARD**  
15mm Thickness

Up To **60KG**

**HOLLOW BLOCK**

### PERFECT FOR FITTING



TV Brackets



Radiators



Cabinets



### TECHNICAL DATA

Substrate	Plasterboard 12.5mm Thickness	25mm Double Board	15mm Dense Board	Block
Thread Ø (mm)	M6	M6	M6	M6
Drill Hole Ø (mm)	13	13	13	13
Rec. Tensile Load (kN)	0.30	0.47	0.56	0.60
Max Rec. Load (kg)	30	47	56	60

Product Code	Screw Length (mm)	Thread Ø (mm)	FCH Ø (mm)	MFT (mm)	Pack Qty (pcs)	Carton Qty (packs)	Pallet Qty (packs)
--------------	-------------------	---------------	------------	----------	----------------	--------------------	--------------------

### BOX

ZIP650	40 and 60	M6	6	45	50	8	192
TYPE - ANC	SUB TYPE - ANC03		FCH = Fixture Clearance Hole, MFT = Max. Fixture Thickness				

Product Code	Screw Length (mm)	Thread Ø (mm)	FCH Ø (mm)	MFT (mm)	Pack Qty (pcs)	Carton Qty (packs)	Pallet Qty (packs)
--------------	-------------------	---------------	------------	----------	----------------	--------------------	--------------------

### BAG


ZIP6	40 and 60	M6	6	45	10	42	1260
TYPE - ANC	SUB TYPE - ANC03		FCH = Fixture Clearance Hole, MFT = Max. Fixture Thickness				

## DRILL



Drill a 13mm hole in the substrate. 50mm cavity clearance required behind substrate.

## PUSH

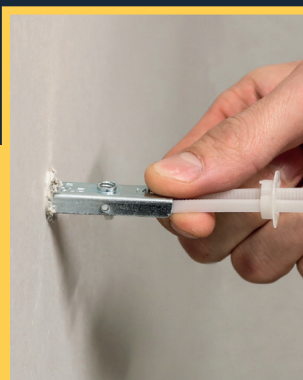

Ensuring the thumb tab faces upwards, insert the metal toggle through the hole, so it pivots down behind the substrate.

## ZIP



Zip the nylon collar towards the wall so the collar sits into the drilled hole. Then snap off the nylon arms.

## FIX



Insert a M6 screw through the fixture and into the threaded part of Zip-Fix and tighten until secure.