


# Insulation Fixings



## Metal Insulation Fixings

Zinc

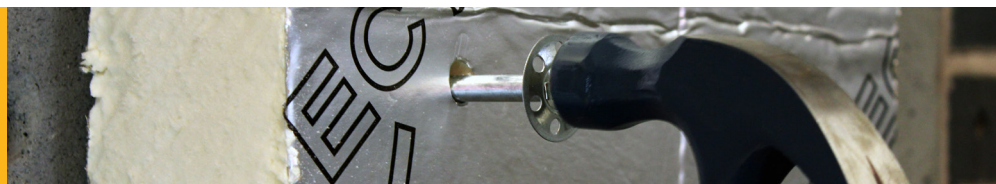

CORROSION RATING




Clean, dry & low humidity environments

Designed to anchor insulation material to concrete and masonry substrate materials.

20KG

Technical Data	
Substrate	Concrete ≥ 25N/mm <sup>2</sup>
Type	Metal
Drill Hole Ø (mm)	8.0
Min. Embedment Depth (mm)	50
Min. Drill Hole Depth (mm)	60
Rec. Tensile Load (kN)	0.20
Max Rec. Load (kg)	20



Product Code	Size Ø x L (mm)	Max. Fixture Thickness (mm)	Pack Qty (pcs)	Carton Qty (packs)	Pallet Qty (packs)
<b>BAG</b>					
MIF60	8.0 x 60	10	100	6	240
MIF90	8.0 x 90	40	100	4	160
MIF110	8.0 x 110	60	100	3	120
MIF140	8.0 x 140	90	100	3	120
MIF170	8.0 x 170	120	50	5	200
MIF200	8.0 x 200	150	50	4	160
MIF250	8.0 x 250	200	50	5	200
MIF300	8.0 x 300	250	50	5	200

TYPE - TAF SUB TYPE - TAF01

## Plastic Insulation Fixings

Plastic




One piece impact resistant copolymer.

Note: Once installed, the head of the fixing should be taped and sealed to avoid any contact with wet plaster. Failure to do so may result in surface damage.

15KG

Technical Data	
Substrate	Concrete ≥ 25N/mm <sup>2</sup>
Type	Plastic
Drill Hole Ø (mm)	8.0
Min. Embedment Depth (mm)	40
Min. Drill Hole Depth (mm)	50
Rec. Tensile Load (kN)	0.15
Max Rec. Load (kg)	15



Product Code	Size Ø x L (mm)	Max. Fixture Thickness (mm)	Pack Qty (pcs)	Carton Qty (packs)	Pallet Qty (packs)
<b>BAG</b>					
PIF50	8 x 50	10	100	10	240
PIF70	8 x 70	30	100	10	240
PIF90	8 x 90	50	100	8	192
PIF110	8 x 110	70	100	8	192
PIF130	8 x 130	90	100	8	192

TYPE - TAF SUB TYPE - TAF01

## Metal Insulation Discs

Zinc



MID35



MID70



MID80

Large diameter head for use with screws to hold insulation material to battens. Also used for ceiling crack repairs.

Note: Once installed, the head of the fixing should be taped and sealed to avoid any contact with wet plaster. Failure to do so may result in surface damage.

Provides a larger surface area when using metal insulation fixings to hold lighter or softer insulation to masonry. Simply slide the fixing through prior to installation. Use with Metal insulation fixings. Can also be used with large gauge and long screws for fixing insulation to timber

NEW

Stainless Steel



MID36SS

Large diameter head for use with countersunk screws to hold insulation material to battens. Stainless steel material for improved corrosion resistance.

Product Code	Ø (mm)	Hole Size Ø (mm)	Pack Qty (pcs)	Carton Qty (packs)	Pallet Qty (packs)
<b>BOX</b>					
<b>Zinc</b>					
MID35	35	5.0	100	35	840
MID70	70.0	10.0	100	16	384
MID80	85.0	12.0	50	16	384
<b>Stainless Steel</b>					
MID36SS	36	5.5	100	35	840

TYPE - TAF SUB TYPE - TAF01

## Plastic Cover Cap For Metal Insulation Fixings




For aesthetics, where metal insulation fixing heads are left exposed after installation.

Product Code	Ø (mm)	Pack Qty (pcs)	Carton Qty (packs)	Pallet Qty (packs)
<b>BAG</b>				
MIFC	38.0	100	25	300

TYPE - TAF SUB TYPE - TAF01

## Metal Oval Stress Plate

Zinc



Frequently used with long screws to attach insulation material to timber. Oval type for use in softer materials, accommodates countersunk screws and recesses itself into insulation for a flush finish.

Note: Once installed, the head of the fixing should be taped and sealed to avoid any contact with wet plaster. Failure to do so may result in surface damage.

Product Code	Size (mm)	Hole Ø (mm)	Pack Qty (pcs)	Carton Qty (packs)	Pallet Qty (packs)
<b>BOX</b>					
MID8240	82 x 40	6.5	50	16	384

TYPE - TAF SUB TYPE - TAF01