

Scotch Tee Hinge



Ideal for heavy weight high use gates and shed doors in domestic, commercial and agricultural applications.

CORROSION RATING

Hot Dipped Galvanised				
1	2	3	4	5

Urban & industrial areas with a moderate salt atmosphere




Technical Data										
Band Length (mm)	100	150	200	250	300	355	400	450	500	600
Band Thickness (mm)	2.2	2.2	2.2	2.2	2.8	3.0	3.0	3.0	3.0	3.0
Knuckle Ø (mm)	11	12	12	12	12	16	16	16	16	16
Leaf Size L x W (mm)	90 x 30	90 x 30	100 x 30	100 x 30	145 x 40	145 x 40	175 x 55	175 x 55	175 x 55	175 x 55
To Suit Gate Width (mm)	200-300	300 - 450	400 - 600	500 - 750	600 - 900	700 - 1050	800 - 1200	900 - 1350	1000 - 1500	1200 - 1800
Max. Gate Weight (kg)	10	25	40	50	60	80	80	100	100	100
No. of Screw Holes (Pair)	12	12	12	12	12	16	16	16	16	16
Screw Ø (mm)	4.0	4.0	5.0	5.0	5.0	5.0	5.0	5.0	5.0	5.0

Doors/gates over 7ft height, should be fitted with a third hinge to prevent warping.

Product Code	Band Length (mm)	Band Length (inch)	Pack Qty (pcs)	Carton Qty (packs)
Hot Dipped Galvanised				
BAG				
442270	100	4	1 Pair	50 Pairs
442159	150	6	1 Pair	50 Pairs
442241	200	8	1 Pair	40 Pairs
442657	250	10	1 Pair	30 Pairs
442225	300	12	1 Pair	25 Pairs
442678	355	14	1 Pair	10 Pairs
442336	400	16	1 Pair	10 Pairs
442784	450	18	1 Pair	10 Pairs
442114	500	20	1 Pair	8 Pairs
442878	600	24	1 Pair	8 Pairs
TYPE - HGB	SUB TYPE - HGB04			

Product Code	Band Length (mm)	Band Length (inch)	Pack Qty (pcs)	Carton Qty (packs)
Hot Dipped Galvanised				
TIMBAG - FIXINGS INCLUDED				
447558	100	4	1 Pair	10 Pairs
447254	150	6	1 Pair	10 Pairs
447232	200	8	1 Pair	10 Pairs
447778	250	10	1 Pair	10 Pairs
447669	300	12	1 Pair	10 Pairs
447552	355	14	1 Pair	8 Pairs
447154	400	16	1 Pair	4 Pairs
447785	450	18	1 Pair	4 Pairs
447336	500	20	1 Pair	10 Pairs
447123	600	24	1 Pair	10 Pairs
TYPE - HGB	SUB TYPE - HGB04			

Medium Strap Hinge

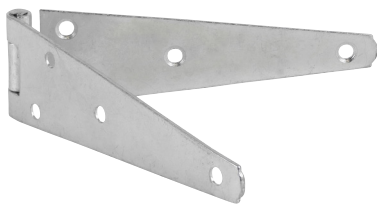

Commonly used for bi-folding garage and shed doors in domestic applications.

CORROSION RATING

Zinc				
1	2	3	4	5


Occasionally damp/wet rural and sheltered areas

Technical Data		
Band Length (mm)	150	200
Band Thickness (mm)	2.0	2.0
Overall Length (mm)	300	400
Knuckle Ø (mm)	10.0	10.0
To Suit Gate Width (mm)	300 - 450	400 - 600
Max. Gate Weight (kg)	20	20
No. of Screw Holes (Pair)	12	16
Screw Ø (mm)	4.0	4.0

Doors/gates over 7ft height, should be fitted with a third hinge to prevent warping.

Product Code	Band Length (mm)	Band Length (inch)	Pack Qty (pcs)	Carton Qty (packs)
Zinc				
BAG				
SH6ZB	150	6	1 Pair	60 Pairs
SH8ZB	200	8	1 Pair	60 Pairs
TYPE - HGB	SUB TYPE - HGB05			

Curved Rail Hinge Set

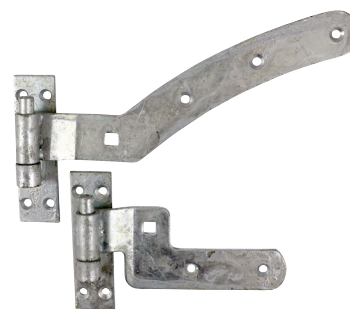

Curved rail hinge sets are ideal for flush mounted fully framed gates with a curved top ledge. Depending on the weight distribution of the gate, the top or bottom pin can be mounted upside down to prevent unwanted removal of the gate.

CORROSION RATING

Hot Dipped Galvanised				
1	2	3	4	5

Urban & industrial areas with a moderate salt atmosphere

Technical Data				
Top Band Length (mm)	300			
Band Width	40			
Band Thickness (mm)	4.8			
Pin Ø (mm)	12			
Pin Ø (inch)	1/2			
Hook Plate L x W (mm)	160 x 50			
No. of Bolt Holes (Pair)	2			
Carriage Bolt Ø (mm)	M10			
No. of Screw Holes (Pair)	13			
Screw Ø (mm)	6.0			

Product Code	Hand	Top Band Length (mm)	Top Band Length (inch)	Bottom Band Length (mm)	Pack Qty (pcs)	Carton Qty (packs)
Hot Dipped Galvanised						
BAG						
CRHLG	Left	300	12	200	1 Pair	5 Pairs
CRHRG	Right	300	12	200	1 Pair	5 Pairs
TYPE - HGB	SUB TYPE - HGB05					