

## Hook on Rectangular Plate



Spare hook on plate for hook and band hinges.

### CORROSION RATING



Urban & industrial areas with a moderate salt atmosphere



### Product Code

Hot Dipped Galvanised	Pin Ø (mm)	Pin Ø (inch)	Hook Plate L x W (mm)	To Suit Band Size (mm)	No. of Screw Holes	Screw Ø (mm)	Pack Qty (pcs)	Carton Qty (packs)
<b>TIMBAG - FIXINGS INCLUDED</b>								
HRP12G	12	1/2	115-40	250-400	8	6.0	1 Pair	20 Pairs
HRP16G	16	5/8	160 x 50	450-600	8	6.0	1 Pair	20 Pairs
HRP19G	19	3/4	200 x 75	750-900	8	6.0	1 Pair	10 Pairs

TYPE - FGH

SUB TYPE - FGH04

## Gate Hooks to Build



### CORROSION RATING



Urban & industrial areas with a moderate salt atmosphere

Gate hooks to build are used for embedding in between layers of the post brickwork and can be used with straight and cranked hook and band hinges.


### Product Code

Hot Dipped Galvanised	Pin Ø (mm)	Pin Ø (inch)	Length (mm)	To Suit Brickwork	To Suit Band Size (mm)	Pack Qty (pcs)	Carton Qty (packs)
<b>TIMBAG - FIXINGS INCLUDED</b>							
GHBSB12G	12	1/2	60	Single	250 - 400	1 Pair	10 Pairs
GHBDB12G	12	1/2	180	Double	250 - 400	1 Pair	10 Pairs
GHBSB16G	16	5/8	65	Single	450 - 600	1 Pair	10 Pairs
GHBDB16G	16	5/8	180	Double	450 - 600	1 Pair	10 Pairs
GHBSB19G	19	3/4	65	Single	750 - 900	1 Pair	10 Pairs
GHBDB19G	19	3/4	180	Double	750 - 900	1 Pair	10 Pairs

TYPE - FGH

SUB TYPE - FGH04

## Bolts

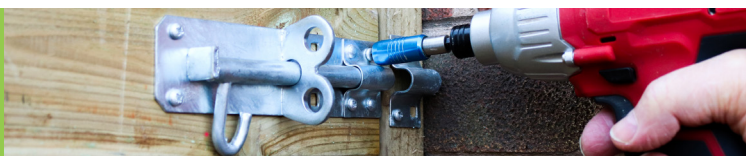


## Brenton Padbolt




Brenton padbolts are used for securing flush mounted gates and shed doors in domestic and light commercial applications. They are pad-lockable and fixed with carriage bolts for added security.

### CORROSION RATINGS



Occasionally damp/wet rural and sheltered areas



Urban & industrial areas with a moderate salt atmosphere

Technical Data			
Bolt Length (mm)	100	150	200
Bolt Ø (mm)	12	12	12
Bolt Throw (mm)	30	45	45
Plate Size (mm)	130 x 45	180 x 45	225 x 45
Staple Keep Size L x W (mm)	56 x 33	56 x 33	56 x 33
Max. Padlock Shackle Ø (mm)	10	10	10
No. of Carriage Bolt Holes	4	4	4
Carriage Bolt Ø (mm)	M6	M6	M6
No. of Screw Holes	6	6	6
Screw Ø (mm)	4.0	4.0	4.0

### Product Code

Epoxy Black	Zinc	Hot Dipped Galvanised	Bolt Length (mm)	Bolt Length (inch)	Pack Qty (pcs)	Carton Qty (packs)
<b>BAG - EXCLUDES FIXINGS</b>						
BP4BB	BP4ZB	BP4GB	100	4	1	10
BP6BB	BP6ZB	BP6GB	150	6	1	10
BP8BB	BP8ZB	BP8GB	200	8	1	10
TYPE - BTB			SUB TYPE - BTB01			
<b>TIMBAG - FIXINGS INCLUDED</b>						
BP4BP	BP4ZP	BP4GP	100	4	1	10
BP6BP	BP6ZP	BP6GP	150	6	1	10
BP8BP	BP8ZP	BP8GP	200	8	1	10
TYPE - BTP			SUB TYPE - BTP01			

## Heavy Brenton Padbolt



Heavy brenton padbolts are used for securing flush mounted gates and shed doors in heavy domestic, commercial and agricultural applications. They are pad-lockable and fixed with carriage bolts for added security.

### CORROSION RATING



Urban & industrial areas with a moderate salt atmosphere

Technical Data				
Bolt Length (mm)	150	200	250	300
Bolt Ø (mm)	16	16	16	16
Bolt Throw (mm)	50	50	50	50
Plate Size (mm)	170 x 60	220 x 60	270 x 60	320 x 60
Staple Keep Size L x W (mm)	60 x 40	60 x 40	60 x 40	60 x 40
Max. Padlock Shackle Ø (mm)	14	14	14	14
No. of Carriage Bolt Holes	4	4	4	4
Carriage Bolt Ø (mm)	M6	M6	M6	M6
No. of Screw Holes	6	6	6	6
Screw Ø (mm)	4.0	4.0	4.0	4.0

### Product Code

Hot Dipped Galvanised	Bolt Length (mm)	Bolt Length (inch)	Pack Qty (pcs)	Carton Qty (packs)
<b>BAG - EXCLUDES FIXINGS</b>				
282656	150	6	1	40
282219	200	8	1	35
282953	250	10	1	25
282632	300	12	1	20
TYPE - BTP			SUB TYPE - BTP01	
<b>TIMBAG - FIXINGS INCLUDED</b>				
287258	150	6	1	10
287456	200	8	1	10
287658	250	10	1	10
287477	300	12	1	10
TYPE - BTP			SUB TYPE - BTP01	