

Heavy Cross Pattern Door Bolt



CORROSION RATING



Urban & industrial areas with a moderate salt atmosphere

Heavy cross pattern bolts are typically used for securing large garage doors and gates in industrial and agricultural applications. They are extremely strong, padlockable and fixed with carriage bolts for high security.

Technical Data			
Bolt Length (mm)	300	450	600
Bolt Ø (mm)	16	16	16
Bolt Throw (mm)	70	150	190
Plate Size L x W (mm)	316 x 64	465 x 64	600 x 64
Staple Keep Size L x W (mm)	95 x 64	145 x 64	145 x 64
Staple Plate Size L x W (mm)	65 x 55	65 x 55	65 x 55
Max. Padlock Shackle Ø (mm)	16	16	16
No. of Carriage Bolt Holes	6	6	6
Carriage Bolt Ø (mm)	M8	M8	M8
No. of Screw Holes	14	14	14
Screw Ø (mm)	5.0	5.0	5.0

Product Code	Bolt Length (mm)	Bolt Length (inch)	Pack Qty (pcs)	Carton Qty (packs)
Hot Dipped Galvanised				
BAG - EXCLUDES FIXINGS				
282639	300	12	1	2
282264	450	18	1	2
282852	600	24	1	2
TYPE - BTP				SUB TYPE - BTP05

Spring Loaded Animal Bolt



CORROSION RATING



Urban & industrial areas with a low salt atmosphere

Ideal for securing flush mounted stable doors and gates in a close position. They are spring loaded to prevent animals working the bolt loose and escaping. Our animal bolts come supplied with a staple keep.

Technical Data			
Bolt Length (mm)	143	225	242
Bolt Ø (mm)	10	12	16
Bolt Throw (mm)	40	65	65
Plate Size L x W (mm)	70 x 40	118 x 40	130 x 50
Staple Plate Size L x W (mm)	50 x 50	50 x 50	65 x 55
No. of Screw Holes	8	8	8
Screw Ø (mm)	5.0	5.0	5.0

Product Code	Bolt Length (mm)	Bolt Length (inch)	Pack Qty (pcs)	Carton Qty (packs)
Hot Dipped Galvanised				
BAG - EXCLUDES FIXINGS				
282454	143	5.7	1	20
282565	225	9	1	20
282417	242	9.5	1	20
TYPE - BTP				SUB TYPE - BTP05
TIMBAG - FIXINGS INCLUDED				
287878	143	5.7	1	5
287663	225	9	1	5
TYPE - BTP				SUB TYPE - BTP05

Monkey Tail Bolt



Monkey tail bolts are ideal for securing the top and / or bottom of gates and doors. They feature an extended length handle for ease of operation and remain closed under tension. Supplied with a flat plate keep and staple keep for fitting in either flush frame mounting, recess frame mounting or floor mounting applications.

CORROSION RATINGS



Occasionally damp/wet rural and sheltered areas




Urban & industrial areas with a moderate salt atmosphere

Technical Data		
Bolt Length (mm)	300	450
Square Bolt (mm)	16 x 16	16 x 16
Bolt Throw (mm)	70	70
Plate Size L x W (mm)	200 x 50	250 x 50
Staple Keep Size L x W (mm)	51 x 31	51 x 31
Flat Keep Size L x W (mm)	49 x 49	49 x 49
Flat Keep Hole Size L x W (mm)	16 x 16	16 x 16
No. of Screw Holes	10	10
Screw Ø (mm)	4.0	4.0

Product Code	Bolt Length (mm)	Bolt Length (inch)	Pack Qty (pcs)	Carton Qty (packs)
Epoxy Black				
Hot Dipped Galvanised				
BAG - EXCLUDES FIXINGS				
MBS12BB	MBS12GB	300	12	1
MBS18BB	MBS18GB	450	18	1
TYPE - BTB				SUB TYPE - BTB08
TIMBAG - FIXINGS INCLUDED				
MBS12BP	MBS12GP	300	12	1
MBS18BP	MBS18GP	450	18	1
TYPE - BTP				SUB TYPE - BTP07

Bow Handle Bolt

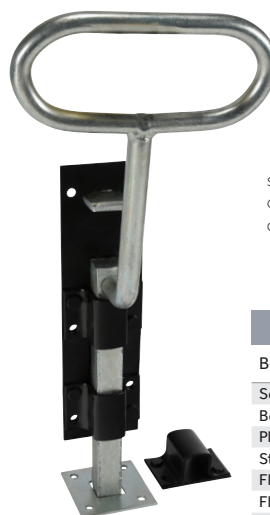

Bow handle bolts are ideal for securing the top and/or bottom of gates and doors. They feature an extended length bow shaped handle for ease of operation and remain closed under tension.

CORROSION RATINGS



Occasionally damp/wet rural and sheltered areas



Urban & industrial areas with a moderate salt atmosphere

Technical Data		
Bolt Length (mm)	300	450
Square Bolt (mm)	16 x 16	16 x 16
Bolt Throw (mm)	70	70
Plate Size L x W (mm)	180 x 50	220 x 50
Staple Keep Size L x W (mm)	51 x 31	51 x 31
Flat Keep Size L x W (mm)	49 x 49	49 x 49
Flat Keep Hole Size L x W (mm)	16 x 16	16 x 16
No. of Screw Holes	10	10
Screw Ø (mm)	4.0	4.0

Product Code	Bolt Length (mm)	Bolt Length (inch)	Pack Qty (pcs)	Carton Qty (packs)
Epoxy Black				
Hot Dipped Galvanised				
BAG - EXCLUDES FIXINGS				
282582	282998	300	12	1
282951	282114	450	18	1
TYPE - BTB				SUB TYPE - BTB08
TIMBAG - FIXINGS INCLUDED				
287665	287771	300	12	1
287332	287117	450	18	1
TYPE - BTP				SUB TYPE - BTP07