

Spring Chain Bolt



Spring garage chain bolts are ideal for securing the top of garage doors or gates. The bolt remains closed under spring tension and features a 450mm long pull chain for easy operation to release the bolt.

Technical Data	
Chain Length (mm)	450
Bolt Throw (mm)	30
Plate Size L x W (mm)	188 x 56
Flat Keep Size L x W (mm)	63 x 51
Flat Keep Hole Size L x W (mm)	18 x 18
Square Bolt (mm)	16 x 16
No. of Screw Holes	8
Screw Ø (mm)	4.0

CORROSION RATING

Epoxy Black	Zinc
1	2

Occasionally damp/wet rural and sheltered areas

Product Code

Epoxy Black	Zinc	Chain Length (mm)	Chain Length (inch)	Pack Qty (pcs)	Carton Qty (packs)
TIMBAG - FIXINGS INCLUDED					
CB18BB	CB18ZB	450	18	1	5
TYPE - BTB		SUB TYPE - BTB06			
TIMBAG - FIXINGS INCLUDED					
CB18BP	CB18ZP	450	18	1	10
TYPE - BTP		SUB TYPE - BTP05			

Foot Bolt



Garage foot bolts are used for securing the bottom of garage doors and gates. They are foot operated making them ideal for environments where a hands free operation is needed.

CORROSION RATING

Epoxy Black	Zinc
1	2

Occasionally damp/wet rural and sheltered areas

Technical Data	
Bolt Length (mm)	200
Square Bolt (mm)	16 x 16
Bolt Throw (mm)	30
Plate Size L x W (mm)	188 x 52
Flat Keep Size L x W (mm)	49 x 49
Flat Keep Hole Size L x W (mm)	18 x 18
No. of Screw Holes	8
Screw Ø (mm)	4.0

Product Code

Epoxy Black	Zinc	Bolt Length (mm)	Bolt Length (inch)	Pack Qty (pcs)	Carton Qty (packs)
TIMBAG - FIXINGS INCLUDED					
GFB8BB	GFB8ZB	200	8	1	30
TYPE - BTB		SUB TYPE - BTB07			
TIMBAG - FIXINGS INCLUDED					
GFB8BP	GFB8ZP	200	8	1	8
TYPE - BTP		SUB TYPE - BTP06			

Cane Bolt



Ideal for lightweight gates, garages and shed doors in light domestic applications. Supplied with socket bolt keep.

Technical Data	
Bolt Length (mm)	300
Bolt Ø (mm)	12
Plate Size L x W (mm)	75 x 40
Socket Keep Size Ø (mm)	16
No. of Screw Holes	4
Screw Ø (mm)	4.0

CORROSION RATING


Epoxy Black	Zinc
1	2

Occasionally damp/wet rural and sheltered areas

Product Code

Epoxy Black	Zinc	Bolt Length (mm)	Bolt Length (inch)	Pack Qty (pcs)	Carton Qty (packs)
BAG - EXCLUDES FIXINGS					
282159		300	12	1	10
TYPE - GAB		SUB TYPE - GAB07			
TIMBAG - FIXINGS INCLUDED					
287254		300	12	1	10
TYPE - GAB		SUB TYPE - GAB07			

Garage Drop Down Bolt

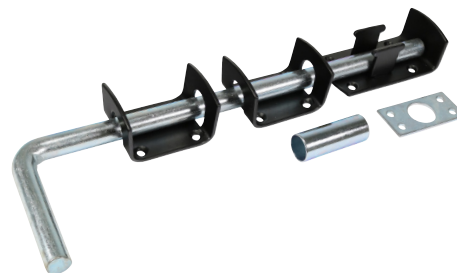

Ideal for securing the bottom of gates and doors in domestic and industrial applications. Extended bolt length for ease of operation and an adjustable bolt throw by moving the keep position.

Technical Data		
Bolt Length (mm)	300	450
Bolt Ø (mm)	14	14
Handle Plate Size L x W (mm)	45 x 88	45 x 88
Keep Plate Size L x W (mm)	45 x 64	45 x 64
Flat Plate Size L x W (mm)	60 x 29	60 x 29
Flat Keep Hole Ø (mm)	20	20
Socket Keep Size Ø x L (mm)	19 x 50	19 x 50
No. of Screw Holes	16	20
Screw Ø (mm)	4.0	4.0

CORROSION RATINGS

Epoxy Black	Zinc
1	2

Occasionally damp/wet rural and sheltered areas

Hot Dipped Galvanised

Epoxy Black	Zinc
1	4

Urban & industrial areas with a moderate salt atmosphere

Product Code

Epoxy Black	Hot Dipped Galvanised	Bolt Length (mm)	Bolt Length (inch)	Pack Qty (pcs)	Carton Qty (packs)
BAG - EXCLUDES FIXINGS					
DDB12BB	DDB12GB	300	12	1	20
DDB18BB	DDB18GB	450	18	1	16
TYPE - BTB		SUB TYPE - BTB08			
TIMBAG - FIXINGS INCLUDED					
DDB12BP	DDB12GP	300	12	1	15
DDB18BP	DDB18GP	450	18	1	15
TYPE - BTP		SUB TYPE - BTP07			