



Heavy Locking Drop Down Bolt

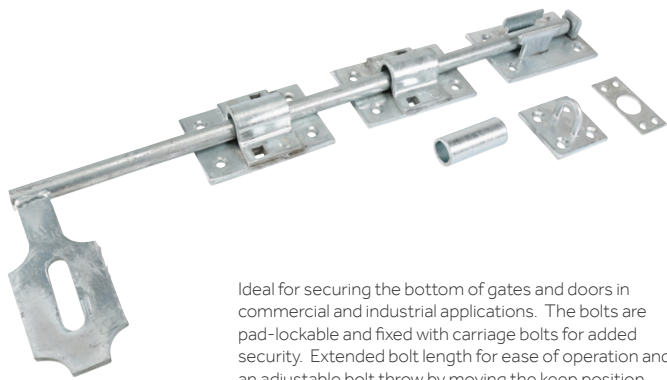

Ideal for securing the bottom of gates and doors in commercial and industrial applications. The bolts are pad-lockable and fixed with carriage bolts for added security. Extended bolt length for ease of operation and an adjustable bolt throw by moving the keep position.



CORROSION RATING



Urban & industrial areas with a moderate salt atmosphere

| Technical Data | |
|-----------------------------------|---------|
| Bolt Length (mm) | 450 |
| Bolt Ø (mm) | 14 |
| Plate Size L x W (mm) | 95 x 64 |
| Flat Keep Size L x W (mm) | 45 x 64 |
| Flat Plate Size L x W (mm) | 60 x 29 |
| Flat Keep Hole Ø (mm) | 20 |
| Socket Keep Size Ø x L (mm) | 19 x 50 |
| Staple Keep Plate Size L x W (mm) | 50 x 50 |
| Max. Padlock Shackle Ø (mm) | 16 |
| No. of Carriage Bolt Holes | 4 |
| Carriage Bolt Ø (mm) | M6 |
| No. of Screw Holes | 16 |
| Screw Ø (mm) | 4.0 |

| Product Code | Bolt Length (mm) | Bolt Length (inch) | Pack Qty (pcs) | Carton Qty (packs) |
|-------------------------------|------------------|--------------------|----------------|--------------------|
| Hot Dipped Galvanised | | | | |
| BAG - EXCLUDES FIXINGS | | | | |
| LDDB18GP | 450 | 18 | 1 | 10 |
| TYPE - BTP | | | | SUB TYPE - BTP07 |

Latches & Catches



Suffolk Latches

Medium Suffolk Latch - Short Thumb Bit 205 x 45mm

For use on light domestic gates. External handle allows gate to be opened from the outside.



Heavy Suffolk Latch - Long Thumb Bit 219 x 50mm

For use on heavy domestic gates. External handle allows the gate to be opened from the outside.



| Technical Data | | |
|--------------------------------|----------|----------|
| Type | Medium | Heavy |
| Backplate Size (mm) | 205 x 45 | 219 x 50 |
| Bar Length (mm) | 203 | 203 |
| Catch Projection (mm) | 80 | 110 |
| Max. Gate Thickness (mm) | 50 | 75 |
| No. of Screw Holes - CSK / Pan | 12 | 14 |
| Screw Ø (mm) | 4.0 | 4.0 |

| Product Code | | Backplate Size L x W (mm) | | Pack Qty (pcs) | Carton Qty (packs) |
|----------------------------------|-------------|------------------------------|------------------|----------------|--------------------|
| Epoxy Black | Zinc | Hot Dipped Galvanised | | | |
| BAG - EXCLUDES FIXINGS | | | | | |
| SLMBB | SLMZB | SLMGB | 205 x 45 | 1 | 5 |
| 523369 | - | 523585 | 219 x 50 | 1 | 30 |
| TYPE - LCB | | | SUB TYPE - LCB01 | | |
| TIMBAG - FIXINGS INCLUDED | | | | | |
| SLMBP | SLMZP | SLMGP | 205 x 45 | 1 | 5 |
| TYPE - LCP | | | SUB TYPE - LCP01 | | |

Ring Gate Latch



For use on light domestic gates. External handle allows the gate to be opened from the outside.



CORROSION RATINGS



Occasionally damp/wet rural and sheltered areas

Hot Dipped Galvanised



Urban & industrial areas with a moderate salt atmosphere

| Technical Data | |
|---------------------------|---------|
| Size (mm) | 150 |
| Bar Length (mm) | 150 |
| Backplate Size L x W (mm) | 70 x 70 |
| Spindle Length (mm) | 100 |
| Max. Gate Thickness (mm) | 75 |
| No. of Screw Holes - Pan | 12 |
| Screw Ø (mm) | 4.0 |

| Product Code | | Size (mm) | | Size (inch) | | Pack Qty (pcs) | Carton Qty (packs) |
|----------------------------------|-------------|------------------------------|------------------|-------------|---|----------------|--------------------|
| Epoxy Black | Zinc | Hot Dipped Galvanised | | | | | |
| BAG - EXCLUDES FIXINGS | | | | | | | |
| RGL6BB | RGL6ZB | RGL6GB | 150 | 6 | 1 | 20 | |
| TYPE - LCB | | | SUB TYPE - LCB02 | | | | |
| TIMBAG - FIXINGS INCLUDED | | | | | | | |
| RGL6BP | RGL6GP | RGL6ZP | 150 | 6 | 1 | 8 | |
| TYPE - LCP | | | SUB TYPE - LCP02 | | | | |

Twisted Ring Gate Latch



For use on light domestic gates. External handle allows the gate to be opened from the outside. The twisted pattern ring handle adds a decorative feature.

CORROSION RATINGS



Occasionally damp/wet rural and sheltered areas

Hot Dipped Galvanised



Urban & industrial areas with a moderate salt atmosphere

| Technical Data | |
|---------------------------|---------|
| Size (mm) | 150 |
| Bar Length (mm) | 150 |
| Backplate Size L x W (mm) | 70 x 70 |
| Spindle Length (mm) | 100 |
| Max. Gate Thickness (mm) | 75 |
| No. of Screw Holes - Pan | 12 |
| Screw Ø (mm) | 4.0 |

| Product Code | | Size (mm) | | Size (inch) | | Pack Qty (pcs) | Carton Qty (packs) |
|----------------------------------|------------------------------|-----------|------------------|-------------|----|----------------|--------------------|
| Epoxy Black | Hot Dipped Galvanised | | | | | | |
| BAG - EXCLUDES FIXINGS | | | | | | | |
| TRGL6BB | TRGL6GB | 150 | 6 | 1 | 30 | | |
| TYPE - LCB | | | SUB TYPE - LCB02 | | | | |
| TIMBAG - FIXINGS INCLUDED | | | | | | | |
| TRGL6BP | TRGL6GP | 150 | 6 | 1 | 8 | | |
| TYPE - LCP | | | SUB TYPE - LCP02 | | | | |