

MULTI-FIX 9 IN 1 INSTANT GRAB ADHESIVE - WHITE




DESCRIPTION

TIMco Multi-Fix® 9 in 1 Instant Grab Adhesive has been developed to give superior rapid bonding strength to all building materials, even in wet conditions.

The high viscosity instant grab formula, eliminates the need for permanent and temporary support and can be painted over almost immediately.

KEY FEATURES

- Hybrid polymer technology
- Adheres to most traditional building materials
- Developed for a majority of trade and DIY applications
- Sets in 15 minutes
- Superior strength, capable of supporting 400kg/10cm²
- Pre-cut notched nozzle for enhanced application
- High E-modulus and high mechanical resistance

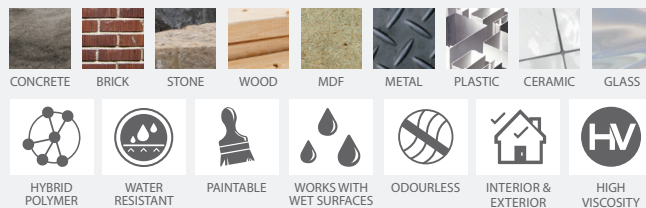

RANGE INFORMATION

Product Code	Size	Colour	Viscosity	Carton Qty
247138	290ml	White	High	12
TYPE - AHS		SUBTYPE - AHS01		

APPLICATIONS

Formulated for bonding most common building substrates but in particular, for fixing of large panels, wallboards and mirrors. Ideal for bonding brick slips, claddings and sanitary fixtures.

Can also be used to fix dado rails, window boards, decorative mouldings.

DIRECTION OF USE

- To ensure a strong adhesion, all surfaces must be clean and dust free.
- Cut the cartridge seal and attach the pre-notched nozzle
- Using a TIMco sealant gun (SKELGUN or PROGUN), apply the adhesive in vertical stripes with 10-20cm in between and then press the fixture firmly into place. Do not apply the adhesive in dots. If the fixture is extremely heavy, a temporary support may be required whilst the adhesive cures.
- Full adhesion strength will be achieved in 24 hours. (Based on a bead of 2-3mm, thicker beads will take longer)

APPLICATION CONDITIONS

100% Modulus	N/mm ²	1.39 Mpa
Application Rate	3mm / 4 bar	20 g/min
Application Temperature From		From +5°C to +40°C
Base		Hybrid
Curing Time		2-3mm / 24 hours
Density		1.57 g/ml
Elongation at Break		335%
Flow	ISO 7390	<2mm
Frost Resistance during transportation		Up to -15°C
Shore-A hardness	DIN 53505	55 Shore A
Skin Formation	23°C / 55% RH	15 mins
Temperature Resistance		From -40°C - +90°C

CLEANING

- Uncured product should be removed from hands, tools and dirty surfaces with a damp cloth or using Shield® Heavy duty or Shield® textured builders wipes.
- After curing, remove from hands with water and soap; from tools remove mechanically.
- DO NOT WASH HANDS WITH SOLVENTS.

PRODUCT PREPARATION

Prior to application, the product should be conditioned at room temperature. Surfaces must be clean, dry and free from dust, grease and other loose material. Adhesion tests prior to application are recommended.

LIMITATIONS

- Not suitable for PE, PP, PC, PMMA, PTFE, neoprene and bituminous substrates.
- Not suitable for continuous water immersion.
- Not suitable in combination with chlorides (pools).
- Not recommended for expansion joints.
- Not suitable as a joint sealant.
- Yellowing can occur in the dark and by contact with chemicals.

SHELF LIFE & STORAGE

- Shelflife of 12 months after production date. Store in unopened, original packaging between +5°C and +25°C in cool, dry conditions.

SAFETY AND HEALTH PRECAUTIONS

- Safety data sheet (MSDS) must be read and understood before use of product. These are available at www.TIMco.co.uk or www.TIMco.ie

MULTI-FIX 9 IN 1 INSTANT GRAB ADHESIVE - CLEAR




DESCRIPTION

TIMco Multi-Fix 9 in 1 Instant Grab Adhesive Clear has been developed to give superior bonding strength to all building materials, even in wet conditions.

The discreet crystal clear and instant grab formula eliminates the need for permanent support and can be painted over almost immediately. Ideal for worktop splashbacks, decorative trims, window boards, plinths, pelmets and more.

KEY FEATURES

- Hybrid polymer technology
- Adheres to most traditional building materials
- Developed for a majority of trade and DIY applications
- Sets in 15 minutes
- Superior strength, capable of supporting 400kg/10cm²
- High E-modulus and high mechanical resistance
- No shrinkage and bubble free
- Free of isocyanates, solvents and silicones
- Neutral curing, almost odourless
- Sandable once fully cured
- Absorbs acoustical and mechanical vibrations

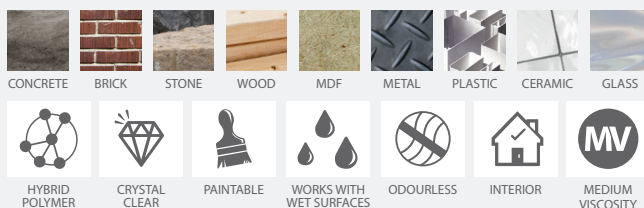

RANGE INFORMATION

Product Code	Size	Colour	Viscosity	Carton Qty
247972	290ml	Clear	Medium	12

TYPE - AHS SUBTYPE - AHS01

APPLICATIONS

Suitable for bonding panels, skirting boards, thresholds and insulation materials. Will bond most common substrates including porcelain, coated metal, epoxy and polyester panels, polystyrene, PVCu, stainless steel, anodised aluminium and finished wood.

DIRECTION OF USE

- To ensure a strong adhesion, all surfaces must be clean and dust free.
- Cut the cartridge seal, attach nozzle and cut to the required size.
- Using a TIMco sealant gun (SKELGUN or PROGUN), apply the adhesive in vertical stripes with 10-20cm in between and then press the fixture firmly into place. Do not apply the adhesive in dots. If the fixture is extremely heavy, a temporary support may be required whilst the adhesive cures.
- Full adhesion strength will be achieved in 24 hours. (Based on a bead of 2-3mm, thicker beads will take longer)

APPLICATION CONDITIONS

100% Modulus	N/mm ²	1.15 Mpa
Application Rate	3mm / 4 bar	140 g/min
Application Temperature From		From +5°C to +40°C
Base		Hybrid
Curing Time		2-3mm / 24 hours
Density		1.06 g/ml
Elongation at Break		250%
Flow	ISO 7390	<2mm
Frost Resistance during transportation		Up to -15°C
Shore-A hardness	DIN 53505	45 Shore A
Skin Formation	23°C / 55% RH	10 mins
Temperature Resistance		From -40°C - +90°C

CLEANING

- Uncured product should be removed from hands, tools and dirty surfaces with a damp cloth or using Shield® Heavy duty or Shield® textured builders wipes.
- After curing, remove from hands with water and soap; from tools remove mechanically.
- DO NOT WASH HANDS WITH SOLVENTS.

PRODUCT PREPARATION

Prior to application, the product should be conditioned at room temperature. Surfaces must be clean, dry and free from dust, grease and other loose material. Adhesion tests prior to application are recommended.

LIMITATIONS

- Not suitable in combination with chlorides (pools).
- Not suitable for movement joints.
- Not suitable for PE, PP, PC, PMMA, PTFE, neoprene and bituminous substrates.
- Not suitable for movement joints.
- Not UV resistant or suitable for external applications, use TIMco Multi-Fix 9in1 Crystal Clear Adhesive & Sealant.

SHELF LIFE & STORAGE

- Shelflife of 12 months after production date. Store in unopened, original packaging between +5°C and +25°C in cool, dry conditions.

SAFETY AND HEALTH PRECAUTIONS

- Safety data sheet (MSDS) must be read and understood before use of product. These are available at www.TIMco.co.uk or www.TIMco.ie