




ZIP-FIX CAVITY WALL FIXING

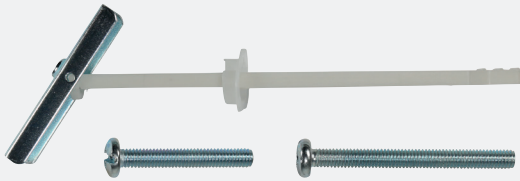

• A heavy duty hollow wall anchor for use in plasterboard, most hollow concrete block, cavity walls and ceilings.

COMBI

DRYWALL BLOCK


① ② ③ ④ ⑤

CLEAN, DRY & LOW HUMIDITY ENVIRONMENTS

ZINC



FEATURES

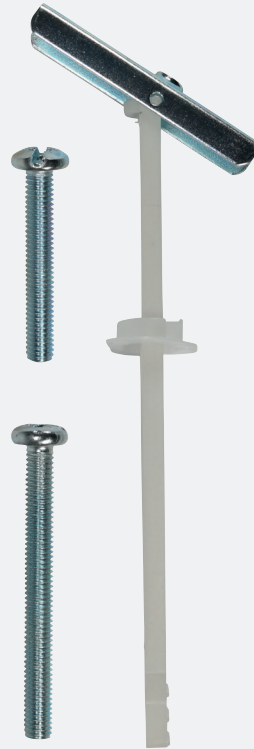

- Comes complete with both 40mm & 60mm pan headed screws for varying fixture thicknesses.
- Zinc plated and passivated (3 microns).
- Standard metric thread.

Please note: The nylon arms are for installation purposes only. Once removed this fixing becomes all-metal and has an improved fire resistance.

PRODUCT RANGE

ZINC

Product Code	Screw L (mm)	Screw Size	FCH Ø (mm)	MFT (mm)	Bag Qty	Carton Qty (Bags)	Carton Qty
ZIP6	40 & 60	M6	13	45	10	42	420

MFH: Maximum Fixture Thickness FCH: Fixture Clearance Hole

INSTALLATION GUIDELINES

Drill a 13mm hole into the substrate. A 50mm cavity clearance required behind substrate.

Ensuring that the thumb tab faces upwards, insert the metal toggle through the hole, so that it pivots down behind the substrate.

Zip the nylon collar towards the wall so that the collar sits into the drilled hole. Then snap off the nylon arms.

Insert a M6 screw through the fixture and into the threaded part of the Zip-Fix and tighten until secure.

TECHNICAL DATA



Substrate	Plasterboard 12.5mm	Plasterboard Double Board 25mm	Dense Board 15mm	Block
Rec. Tensile Load (kN) N _{rec}	0.30	0.47	0.56	0.60
Max Rec. Load (kg)	30	47	56	60

*all figures stated are approximate and for reference only.

INSTALLATION DATA

Product Code	Screw Size	Screw Length L(s) (mm)	Tab Width W (mm)	Drill Hole d ₀ (mm)	Max. Fix. Thickness t _{fix} (mm)
ZIP6	M6	40 & 60	50	13	45

*When installing into standard 12.5mm plasterboard.

DK

W

d₀

L (s)	Screw Length
W	Tab Width
DK	Head Diameter
d ₀	Drill Hole
t _{fix}	Max. Fixture Thickness