


TECHNICAL INFORMATION FOR

HAMMER-IN PLASTERBOARD FIXING

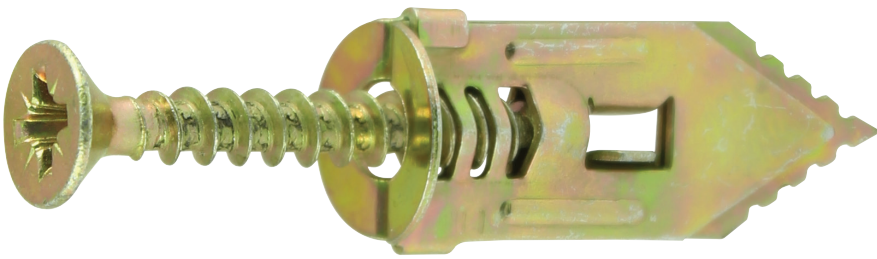

TECHNICAL DATA SHEET

HAMMER IN FIXINGS



- Quick and easy to use, an all metal hammer-in plug for light duty fixing to plasterboard.
- No drilling required, 4.0 x 30 Cross Recess No2 screws included.

POZI

1 2 3 4 5

CLEAN, DRY & LOW HUMIDITY ENVIRONMENTS

YELLOW

DRYWALL

FEATURES



- Zinc plated and yellow passivated, to enhance corrosion resistance.
- Steel material offers improved fire resistance compared to plastic or nylon fixings.
- Does not rotate on screwing.
- Serrated point for easy hammering and rapid insertion.

PRODUCT RANGE

YELLOW


Product Code	Screw Ø x L (mm)	t _{fix} (mm)	Box Qty	Carton Qty (Box)	Carton Qty	Pallet Qty (Box)	Pallet Qty
HPF30	4.0 x 30	6	100	18	1,800	648	64,800

TECHNICAL DATA



Substrate	Plasterboard 12.5mm Thickness
Screw Size (mm)	4.0 x 30
Plug Size (mm)	11 x 30
Rec. Tensile Load (kN)	0.10
Max Rec. Load (kg)	10

INSTALLATION GUIDELINES




HAMMER METAL PLUG INTO PLASTERBOARD

INSERT SCREW THROUGH FIXTURE AND INTO METAL PLUG. TIGHTEN SCREW UNTIL SECURE.


INSTALLATION DATA

Product Code	t _{fix} (mm)	DK (mm)	Screw L (mm)	D (mm)	Plug L (mm)
HPF30	6	7.5	30	4.0	30

*all figures stated are approximate and for reference only.

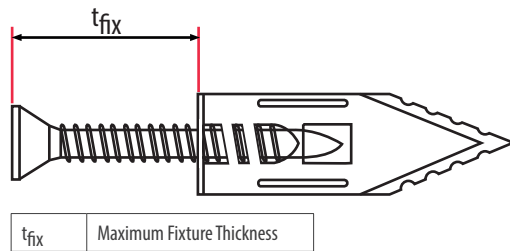


SCREW

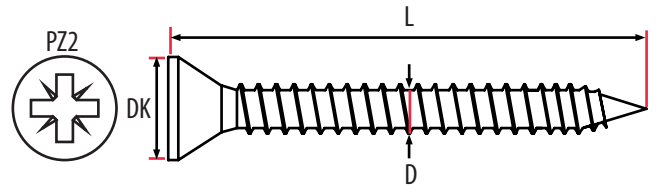

L	Screw Length	DK	Head Diameter
D	Screw Diameter		

PLUG

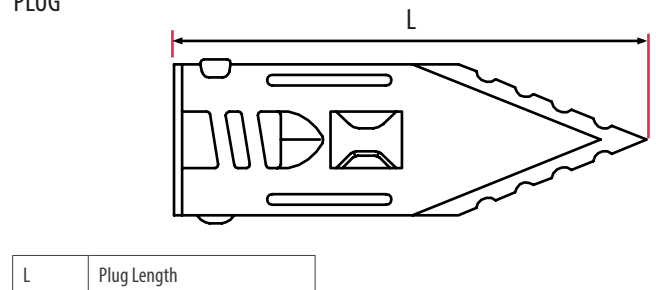

L	Plug Length
---	-------------