


TECHNICAL INFORMATION FOR

---

COLLATED  
DRYWALL SCREWS  
COARSE THREAD

---

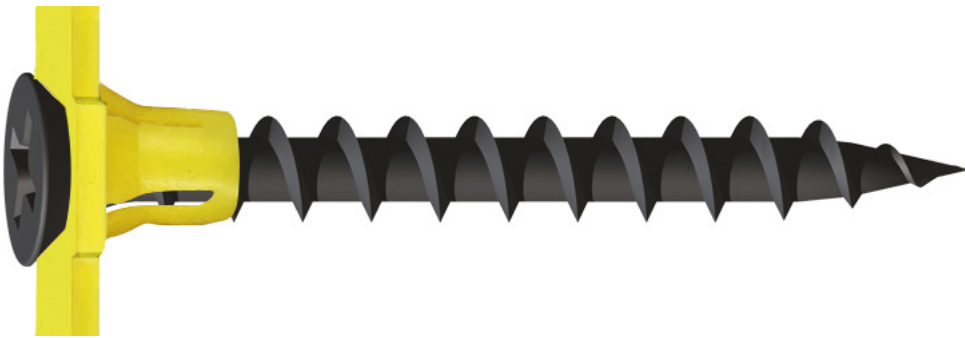



TECHNICAL DATA SHEET



## DRYWALL SCREWS - COARSE THREAD




Used to secure plasterboard to timber stud work

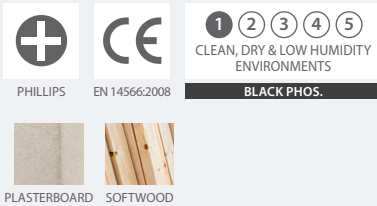

### FEATURES



- Phillips No.2 recess for a positive drive.
- Bugle head to reduce likelihood of damaging the board surface.
- Coarse thread for extreme hold.
- 25° "Super sharp" point for ease of penetration.
- Plated in Black Phosphate to withstand over 50hrs. In accordance with ASTM B117-11.
- Manufactured from a hardened durable C1018 carbon steel, offering excellent strength and ductility.
- Full batch traceability.

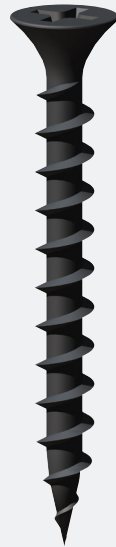

### PRODUCT RANGE

BLACK PHOS.


Product Code	Size (mm)	Box Qty	Carton Qty (Box)	Carton Qty	Pallet Qty (Box)	Pallet Qty
00025COLDYS	3.5 x 25	1,000	10	10,000	320	320,000
00032COLDYS	3.5 x 32	1,000	10	10,000	320	320,000
00035COLDYS	3.5 x 35	1,000	10	10,000	320	320,000
00038COLDYS	3.5 x 38	1,000	10	10,000	240	240,000
00045COLDYS	3.5 x 45	1,000	10	10,000	240	240,000
00050COLDYS	3.5 x 50	1,000	10	10,000	240	240,000
00055COLDYS	3.5 x 55	1,000	10	10,000	240	240,000
00065COLDYS	4.2 x 65	500	10	5,000	240	120,000
00075COLDYS	4.2 x 75	500	10	5,000	240	120,000

### DIMENSIONS


Product Code	DK (mm)	L (mm)	d (mm)	D (mm)	TI (mm)
00025COLDYS	8.25	25.0	2.3	3.50	19.5
00032COLDYS	8.25	32.0	2.3	3.50	26.5
00035COLDYS	8.25	35.0	2.3	3.50	29.5
00038COLDYS	8.25	38.0	2.3	3.50	32.5
00045COLDYS	8.25	45.0	2.3	3.50	39.5
00050COLDYS	8.25	50.0	2.3	3.50	44.5
00055COLDYS	8.25	55.0	2.3	3.50	49.5
00065COLDYS	8.25	65.0	2.6	4.20	59.5
00075COLDYS	8.25	75.0	2.6	4.20	69.5

\*all figures stated are approximate and for reference only.

DK	Head Diameter	d	Minor diameter
L	Length	D	Major Diameter
TI	Thread Length		

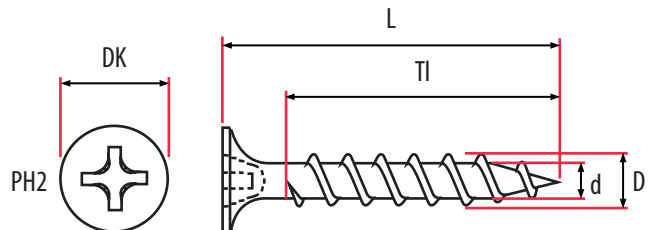

### COLLATED STRIP



### FEATURES

- Light density polyethylene (LDPE) material
- Unique yellow colour
- Tight tolerances to ensure universal compatibility
- 50 screws per strip (wide choice available)