


TECHNICAL INFORMATION FOR


COLLATED SCREWS



TECHNICAL DATA SHEET

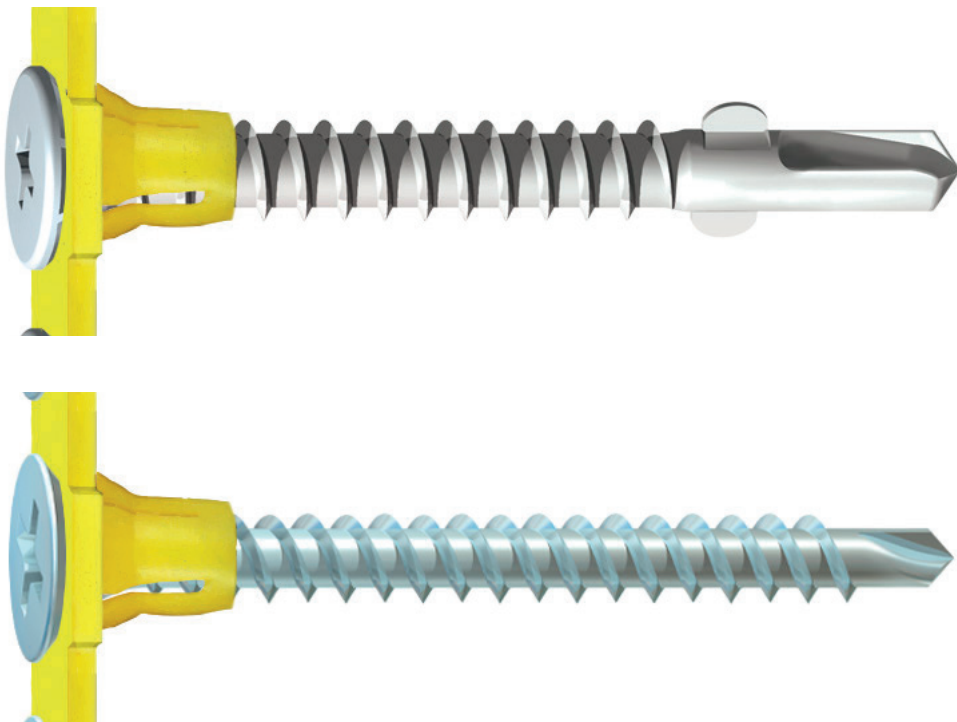

COLLATED WING TIP SELF DRILLING SCREW

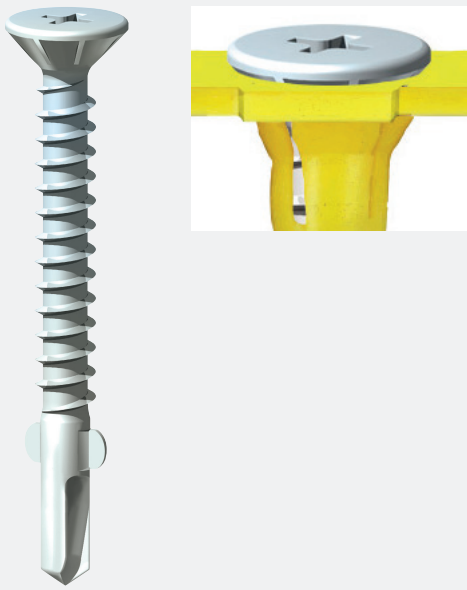

FEATURES

- PH2 Recess
- Self-countersinking ribs
- Wings to pull timber to steel (up to 4mm)
- Hardened carbon steel with silver ruspert finish to withstand 500hours salt spray testing (44mm only)
- Coarse 60° self tapping thread for excellent holding power & rapid insertion
- Minimum torsional strength of 64kg/cm
- Suggested 1800-2500rpm
- Head diameter 9mm max
- Case & core hardened for durability & strength



PHILLIPS

- ①
- ②
- ③
- ④
- ⑤

URBAN & INDUSTRIAL AREAS WITH A LOW SALT ATMOSPHERE

EXTERIOR

- ①
- ②
- ③
- ④
- ⑤

CLEAN, DRY & LOW HUMIDITY ENVIRONMENTS

ZINC



STEEL


PRODUCT RANGE

Product Code	Diameter (mm)	Length (mm)	Plating	Box Qty	Carton Qty (Box)	Carton Qty
00044COLLW	4.8	44	Exterior	1,000	10	10,000
4865COLLW	4.8	65	Zinc	500	10	5,000

DIMENSIONAL DATA

Product Code	D (mm)	L (mm)	d _p (mm)	DK (mm)	b (mm)	B (mm)
00044COLLW	4.8	44.0	4.0	8.8	3.0	6.0
4865COLLW	4.8	65.0	4.0	8.8	3.0	6.0


*all figures stated are approximate and for reference only.

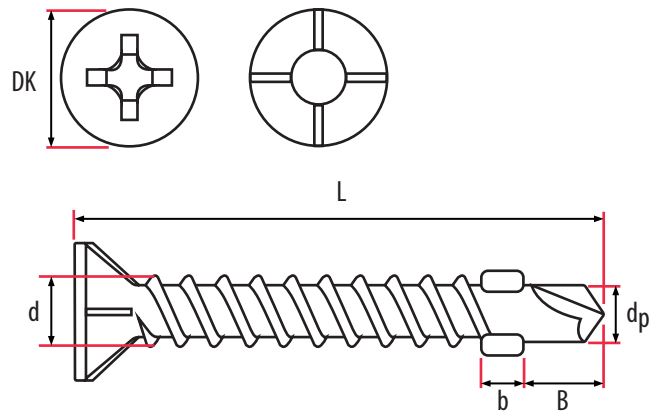

D	Diameter
DK	Head Diameter
L	Length

d _p	Drill Point Diameter
b	Wing Length
B	Drill Point

COLLATED STRIP

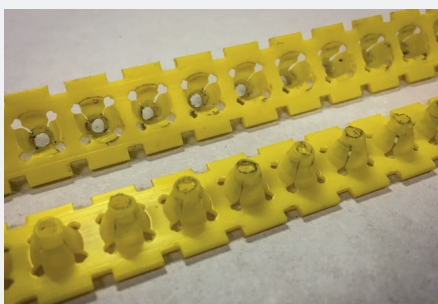

FEATURES

- Light density polyethylene (LDPE) material
- Unique yellow colour
- Tight tolerances to ensure universal compatibility
- 50 screws per strip (wide choice available)



COLLATED SELF DRILLING SCREW



FEATURES

- PH2 Recess
- Bugle head to stop paper surface being damaged
- Hardened carbon steel
- Bright zinc plated to withstand 96hours salt spray testing
- 60° self tapping thread
- Minimum torsional strength of 28kg/cm
- 1800-2500rpm
- Head diameter 8.4mm maximum
- For fixing plasterboard to steel 0.7 – 2.5mm thick


PRODUCT RANGE

Product Code	Size (mm)	Box Qty	Carton Qty (Box)	Carton Qty	Pallet Qty (Box)	Pallet Qty
00035COLLSD	3.5 x 35	1,000	10	10,000	320	320,000
00045COLLSD	3.5 x 45	1,000	10	10,000	240	240,000
00050COLLSD	3.5 x 50	1,000	10	10,000	240	240,000

DIMENSIONAL DATA


Product Code	D (mm)	L (mm)	d _p (mm)	DK (mm)	K (mm)
00035COLLSD	3.5	35	2.8	8.2	3.57
00045COLLSD	3.5	45	2.8	8.2	3.57
00050COLLSD	3.5	50	2.8	8.2	3.57

*all figures stated are approximate and for reference only.

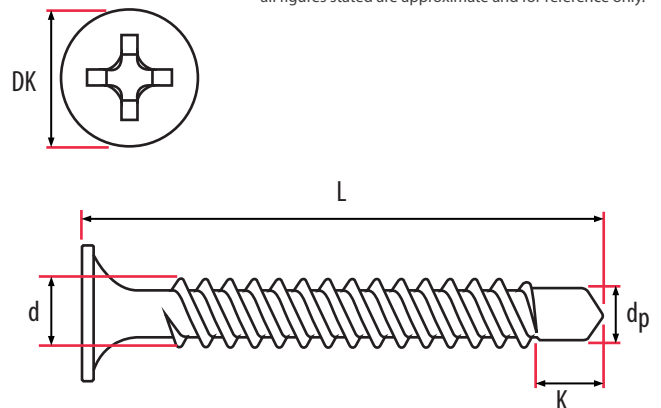

D	Diameter	d _p	Drill Point Diameter
DK	Head Diameter	K	Drill Point
L	Length		

COLLATED STRIP

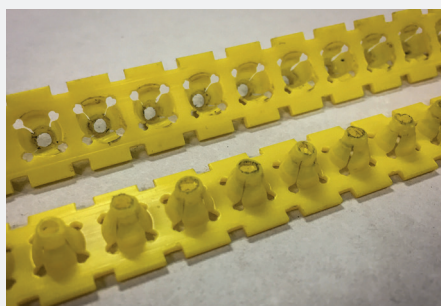

FEATURES

- Light density polyethylene (LDPE) material
- Unique yellow colour
- Tight tolerances to ensure universal compatibility
- 50 screws per strip (wide choice available)